

SkelStart 12V

MORE STARTING POWER

ULTRACAPACITORS HAVE
MULTIPLE BENEFITS OVER
BATTERIES




ULTRACAPACITOR-BASED SPACE TECHNOLOGY THAT STARTS YOUR ENGINE

ULTRACAPACITORS USE ELECTRIC FIELD (FAST)



- + ALMOST INSTANT CHARGING AND DISCHARGING
- + HIGH POWER
- + LOW ENERGY
- + NOT TEMPERATURE SENSITIVE
- + LONG LIFETIME



BATTERIES USE A CHEMICAL REACTION (SLOW)



- + SLOW CHARGING AND DISCHARGING
- + LOW POWER
- + HIGH ENERGY
- + TEMPERATURE SENSITIVE
- + SHORT LIFETIME

THE SKELSTART ENGINE START MODULE ALWAYS PROVIDES THE STARTING POWER, WHILE BATTERIES HANDLE ALL THE OTHER LOADS.

ADVANTAGES & DISADVANTAGES

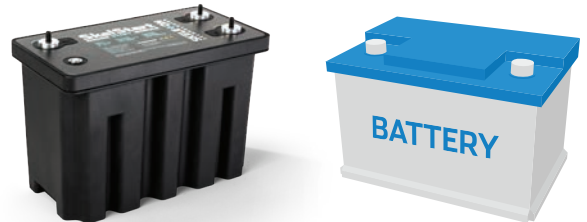

**HIGH POWER
(FOR STARTING)**



**HIGH ENERGY
(FOR HOTEL LOADS)**



**ZERO TO FULL
IN MINUTES**



**LONG LIFETIME
(1 000 000 CYCLES)**



**WORKS IN EXTREME
TEMPERATURES**



The same technology is used by ESA, which means it has been tested for the harshest environment possible - space.

SkelStart is based on Skeleton Technologies' industry-leading SkelCap ultracapacitors, which have the highest power and energy density on the market. This advantage carries over to SkelStart, making it the most powerful engine start module on the market.

WHAT DOES IT MEAN FOR THE USER?

RELIABLE STARTING

- + Much higher peak power than batteries can provide
- + Temperature won't affect starting power
- + Starting power even with „dead“ batteries – If SkelStart energy is used, it needs only 9V to be recharged again. SkelStart will be fully charged in few minutes.

FUEL CONSUMPTION DECREASE

- + No need for idling to charge the batteries
- + Measured example: Idling fuel consumption from 6% to 2% = 400L/year

BATTERY LIFETIME INCREASE

- + Starting power doesn't come directly from batteries
- + More energy stored by the end of the work day
- + Battery lifetime will be increased 1.5 – 2x


NO HASSLE - ONE TIME INVESTMENT

- + Lifetime 1M cycles, no maintenance needed

REAL LIFE USE CASE:

“Our truck is often on stand-by mode for a long time. Starting the engine has always been an issue. We liked the idea that the ESM holds full charge for 3 months and even if the ESM energy is used, it needs only 9V and couple of minutes to be fully charged from “dead” batteries. This allows us to start the engine regardless of the status of the batteries, to be more operational and to not worry about jump-start capability if we are on the road”

- Janno Oras, Kalev AS

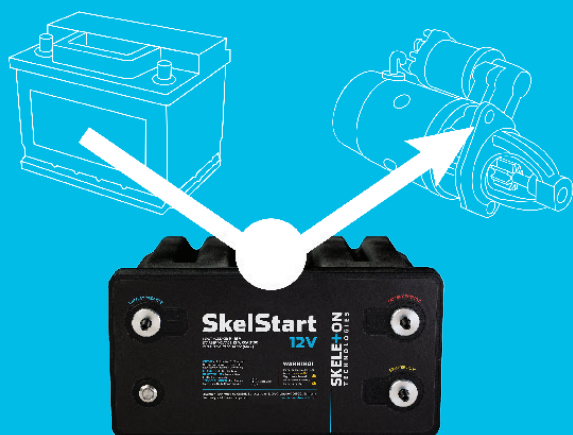

SKELSTART EASY INSTALLATION

Skelstart is installed between the batteries and the starter, which means the batteries are disconnected from the starter.

Skelstart will always provide the starting power for the engine, and the batteries will only need to provide energy for lights, air conditioning, heating, etc.

SkelStart

12V



SPECIFICATIONS

SkelStart 12V	Unit	
Cold Cranking Amps (CCA)*	A	2130
Maximum Peak Current (1 sec current)**	A	3829
Peak Power*	kW	44.7
Charged full voltage	V	14.1
Energy	Wh	35
Rated Capacitance	F	1360
Individual Cell Capacitance	F	3400
Charging current	A	20 (max)
Continuous input voltage range	V	9-16
Continuous input voltage range with specified charge time	V	11.5-16
Recharge time (from 0 V)	min	20
Operating temperature	Deg °C	-40 to +65
Standby current draw	mA	<10
Dimensions	mm	328 L x 171 W x 241 H
Weight	kg	8.5

* Based on 1s ESR

*** The stated maximum peak current should not be exceeded during use. If the limit is to be exceeded by the customer, Skeleton must be consulted beforehand and give approval for the exceeded power load.



Key Maintenance Technologies,
204 Carmichael Close NW,
Edmonton, Alberta T6R 2K6
Phone (780) 437-7659
Fax (780) 434-5312
Toll Free (866) 437-7659
Email infodesk@kmt1.ca

SAMANTHA BUNES
780.288.2588
samantharb@kmt1.ca
www.kmt1.ca